



OJAS

NNNN

ON M III Club System

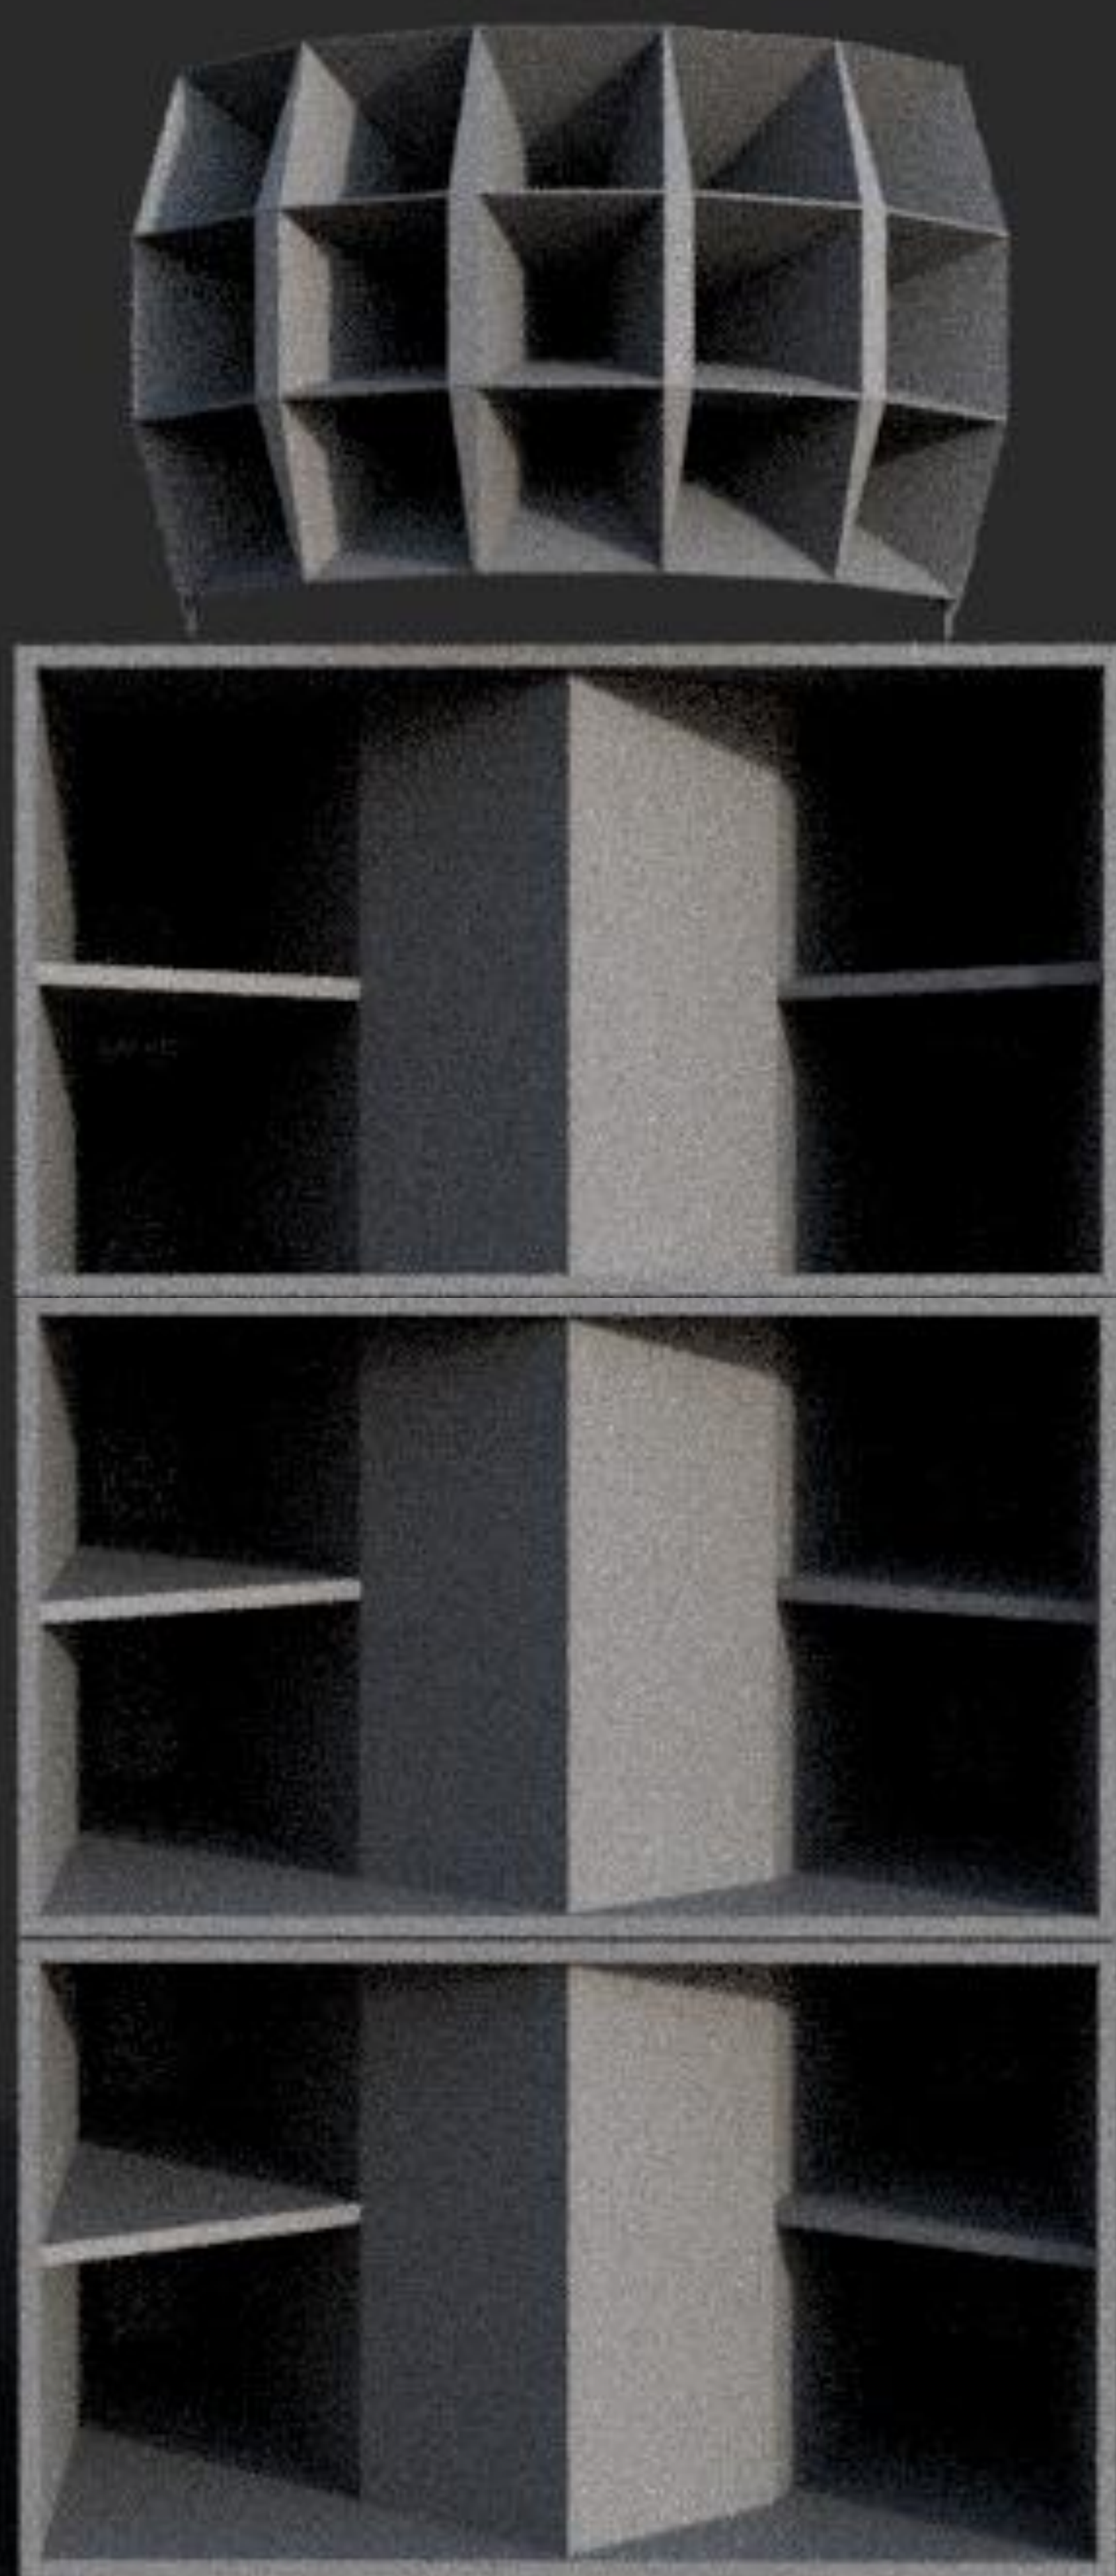

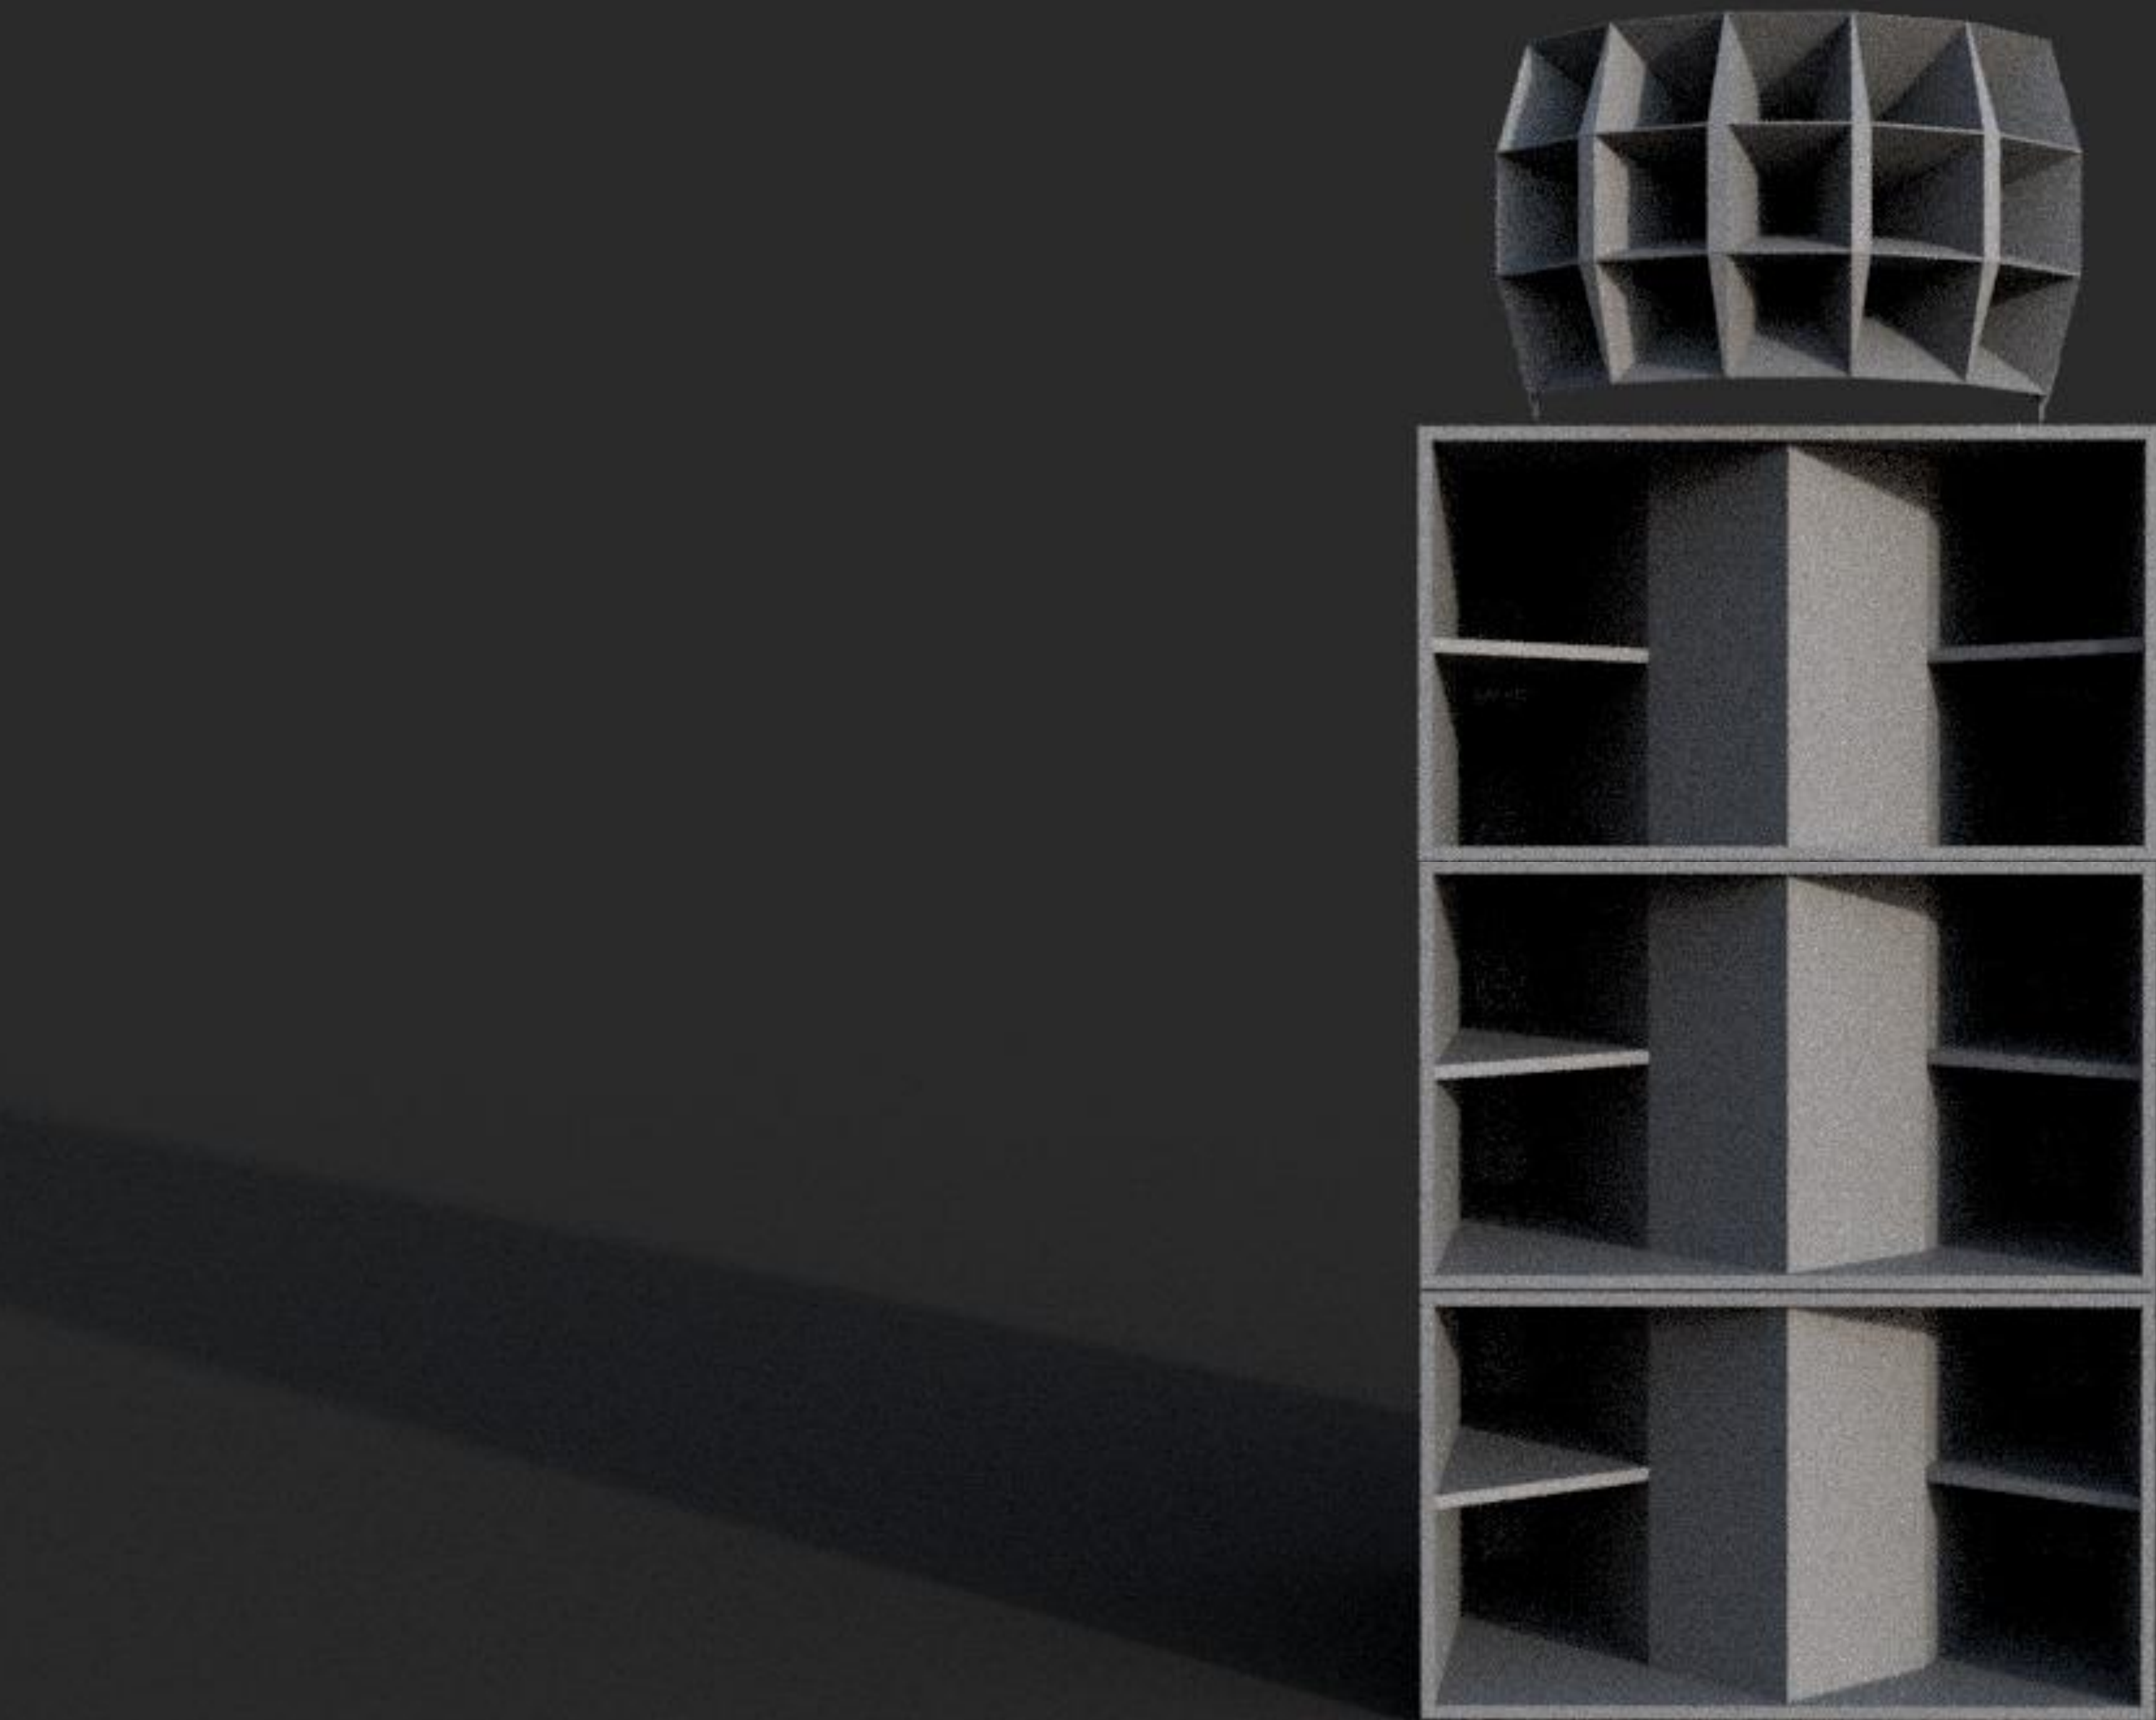

Preliminary Specifications:

Configuration	Active 3-way
Frequency response (3dB)	30 Hz - 22 kHz
Max peak output (1m)	148 dB*
Max output (1m)	141 dB*
Nominal dispersion	105°x60°
Connections	Speakon 4-pole
Rigging	Ground stacked
Width	1008 mm / 39.7 in
Depth	1008 mm / 39.7 in
Height	2260 mm / 89.0 in
Weight	299 kg / 660 lbs

*Simulated

Powerhandling (RMS)

HF/supertweeter:	80W
Mid:	150W
Bass:	1700W x3
Amp recommendations	Powersoft
X-series	1× X4 per stack, 1× X8 per pair
Unica-series	1× 4L 16K4 per stack
T-series	1× T904 per stack

The club system is a 3 ways active system where each loudspeaker stack consists of three single 21” basshorns and a classic style wide dispersion multicell horn loaded with a modern coaxial high end compression driver.

The coaxial compression driver ensures that the super tweeter experience is coherent with the mid range and the listeners will have a point source experience.

The basshorn bandwidth of more than three octaves provides an extraordinary physical experience.